


# CL-417, CL-417C

**1W LED/ 50 000 h | IP42 protection | Polycarbonate body/white | Mounting: Hanging, sidewall or ceiling, recessed into the ceiling | 24 meters visibility**

High-quality double sided LED exit sign. It was designed mainly for buildings with high aesthetic requirements (hotels, business centres). The CL-417 luminaire suitable for types of mounting: to the ceiling, parallel to the sidewall and perpendicularly to the sidewall. The suspension accessories and recessed frame (CL-417C) are sold separately.

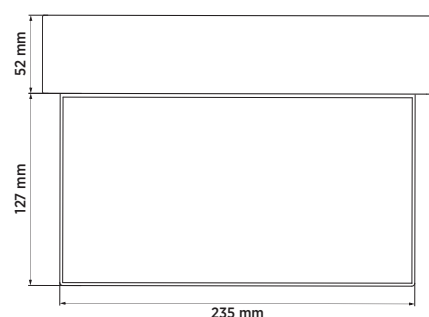

Method of supply	Main battery (Ni-Mh)		Central battery	
	Addressable	Conventional	Addressable	Conventional
Mains supply	120-240V AC/DC		120-240V AC/DC	
System	Addressable	Conventional	Addressable	Conventional
<b>Product code</b>	<b>CL-417/CL-417C SLAVE/MB</b>	<b>CL-417/CL-417C SLAVE/CON/MB</b>	<b>CL-417/CL-417C SLAVE/CB</b>	<b>CL-417/CL-417C SLAVE/CON/CB</b>
Input current (240V)	18mA	14mA	8.5mA	10mA
Operation	Standby/Permanent	Standby/Permanent	Standby/Permanent	Standby/Permanent
Bridging time	1-3h	1-3h	-	-
Control LED	Yes	Yes	Yes	No
Method of checking	Automatic	Manual	Automatic	Manual
Certification	CE			