


CL-617

1W LED/ 50 000 h | IP65 protection | Polycarbonate body/white | Mounting: On sidewall | 17 meters visibility



Tough IP65 rated exit showing light. Intended to be used in dry and wet locations as well (rest room, cellar, outside, garage, ect.)

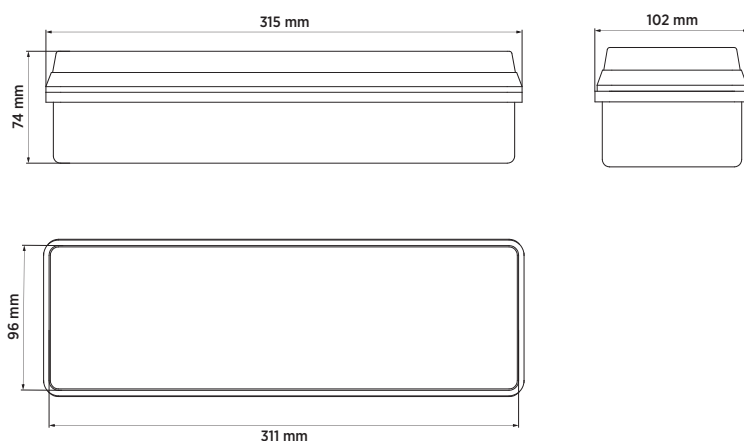

Method of supply	Main battery (Ni-Mh)		Central battery	
Mains supply	120-240V AC/DC		120-240V AC/DC	
System	Addressable	Conventional	Addressable	Conventional
Product code	CL-617 SLAVE/MB	CL-617 SLAVE/CON/MB	CL-617 SLAVE/CB	CL-617 SLAVE/CON/CB
Input current (240V)	18mA	14mA	8.5mA	10mA
Operation	Standby/Permanent	Standby/Permanent	Standby/Permanent	Standby/Permanent
Bridging time	1-3h	1-3h	-	-
Control LED	Yes	Yes	Yes	No
Method of checking	Automatic	Manual	Automatic	Manual
Certification	CE, TÜV			