



## CL-817

**1W LED/ 50 000 h | IP65 protection | Polycarbonate body/white | Mounting: Recessed into the sidewall | 17 meters visibility**

This exit LED light can be recessed into sidewalls made of plasterboard, or other stratified material. Thanks to IP 65 protection, it is suitable for industrial areas and for external use as well.

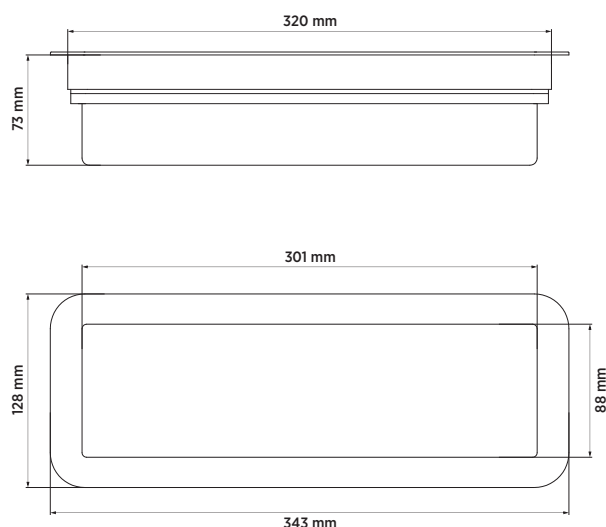

Method of supply	Main battery (Ni-Mh)		Central battery	
	120-240V AC/DC			
Mains supply	120-240V AC/DC		120-240V AC/DC	
System	Addressable	Conventional	Addressable	Conventional
<b>Product code</b>	<b>CL-817 SLAVE/MB</b>	<b>CL-817 SLAVE/CON/MB</b>	<b>CL-817 SLAVE/CB</b>	<b>CL-817 SLAVE/CON/CB</b>
Input current (240V)	18mA	14mA	8.5mA	10mA
Operation	Standby/Permanent	Standby/Permanent	Standby/Permanent	Standby/Permanent
Bridging time	1-3h	1-3h	-	-
Control LED	Yes	Yes	Yes	No
Method of checking	Automatic	Manual	Automatic	Manual
Certification	CE, TÜV			