

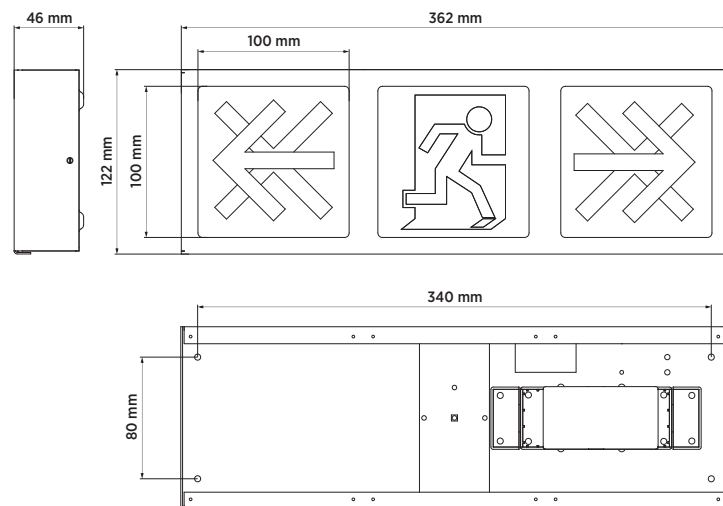


CL-D200

LED/ 50 000 h | IP20 protection | Metal body/white | Mounting: On sidewall or ceiling with console | 20 meters visibility

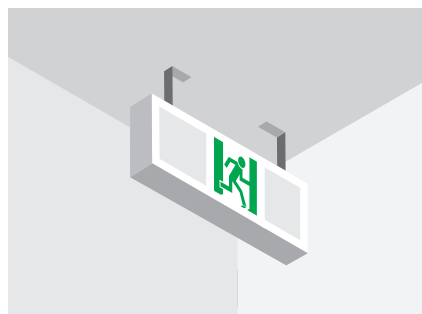

Dynamic LED exit light for sidewall or ceiling with console. It is recommended in buildings, where more escape routes are possible. In case of emergency the control panel receives information from the fire alarm centre regarding the location of the fire. Then it informs the light about the right escape route to show. The suspension accessories are sold separately.

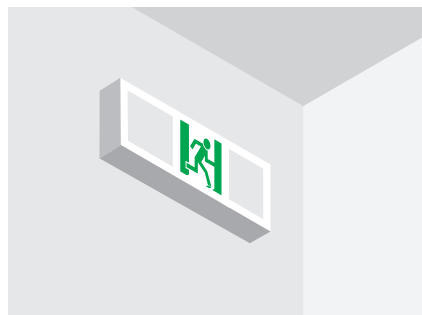

	CL-D200 SLAVE/CB
Mains supply	120-240 VAC 50/60 Hz
System	Addressable
Battery	Central battery
Input current (240V)	30 mA
Operation	Standby/Permanent
Control LED	Yes
Method of checking	Automatic
Certification	CE