



CL-313 R/F

3W LED/ 50 000 h | IP20 protection | Polycarbonate body/black/white/grey | Mounting: On ceiling | 191 lm

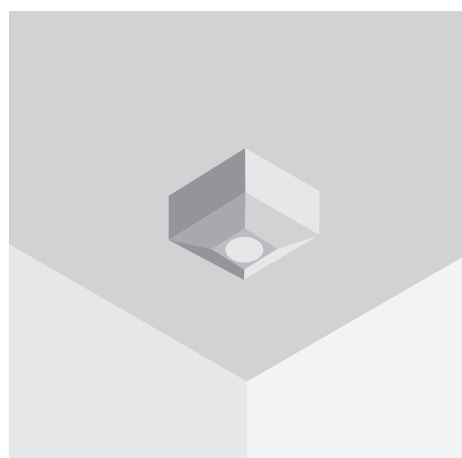

LED safety light for the illumination of escape areas. Suitable for surface mounting. It can be ordered with round LED lens (R) or with lens for corridors (F) according to our customers' needs.

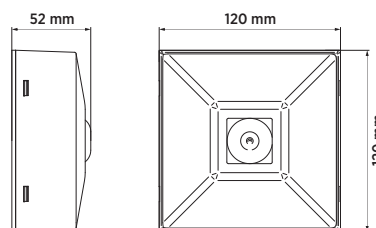

Mounting of lamps relative to each other:
transverse to transverse

For example mounting

height: 3 m

a: 4.38 m

b: 2.48 m

c: 10.62 m

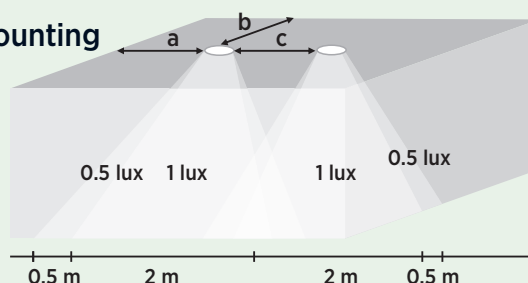


illustration: with corridor (F) lens

Method of supply	Main battery (Ni-Mh)		Central battery	
	Mains supply	120-240 VAC 50/60 Hz		120-240 VAC 50/60 Hz
System	Addressable	Conventional	Addressable	Conventional
Product code	CL-313 R/F SLAVE/MB	CL-313 R/F SLAVE/CON/MB	CL-313 R/F SLAVE/CB	CL-313 R/F SLAVE/CON/CB
Input current (240V)	12mA	8mA	18mA	17mA
Operation	Standby	Standby	Standby	Standby/Permanent
Bridging time	1-3h	1-3h	-	-
Control LED	Yes	Yes	Yes	No
Method of checking	Automatic	Manual	Automatic	Manual
Certification	CE, UL			