


CL-313C R/F

3W LED/ 50 000 h | IP20 protection | Polycarbonate body/black/white/grey | Mounting: recessed into the ceiling | 191 lm

LED safety light for the illumination of escape areas. Suitable for recessing into the ceiling. It can be ordered with round LED lens (RC) or with lens for corridors (C/F or C/R) according to our customers' needs.

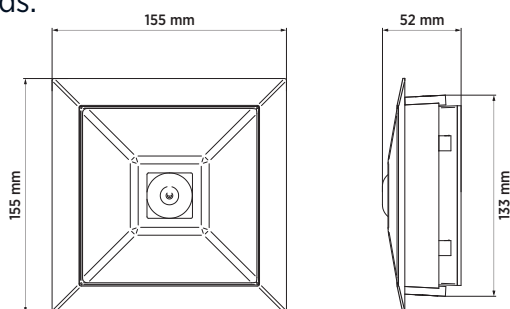

Mounting of lamps relative to each other:

axial to axial

For example mounting

height: 3 m

a: 2.3 m

b: 2.32 m

c: 7.37 m


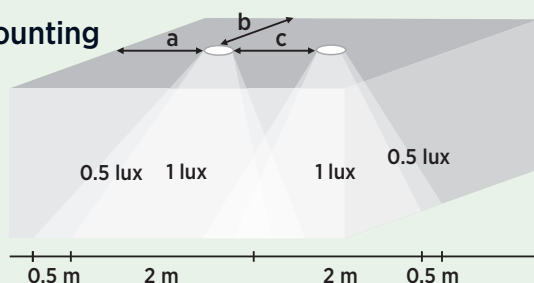


illustration: with round LED (R) lens

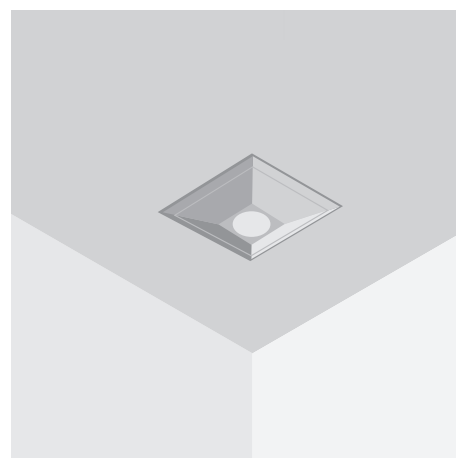

Method of supply	Main battery (Ni-Mh)		Central battery	
Mains supply	120-240 V AC 50/60Hz		120-240 V AC 50/60Hz	
System	Addressable	Conventional	Addressable	Conventional
Product code	CL-313 C R/F SLAVE/MB	CL-313 C R/F SLAVE/CON/MB	CL-313 C R/F SLAVE/CB	CL-313 C R/F SLAVE/CON/CB
Input current (240V)	12mA	8mA	18mA	17mA
Operation	Standby	Standby	Standby	Standby/Permanent
Bridging time	1-3h	1-3h	-	-
Control LED	Yes	Yes	Yes	No
Method of checking	Automatic	Manual	Automatic	Manual
Certification	CE, UL			