


CL-4014R



4W LED/ 50 000 h | IP20 protection | Polycarbonate body/black/white/grey | Mounting: Recessed into the ceiling | 305 lm

Aesthetic LED safety light for recessing into the ceiling. It is available with round LED lens. It has a great effective range, its practical design makes it easy to install.

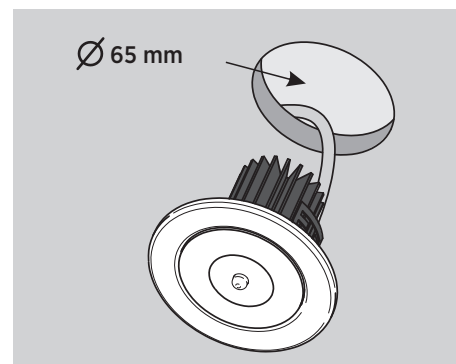

Mounting of lamps relative to each other:
transverse to transverse

For example mounting height: 3 m
a: 4.21 m
b: 4.21 m
c: 10.88 m

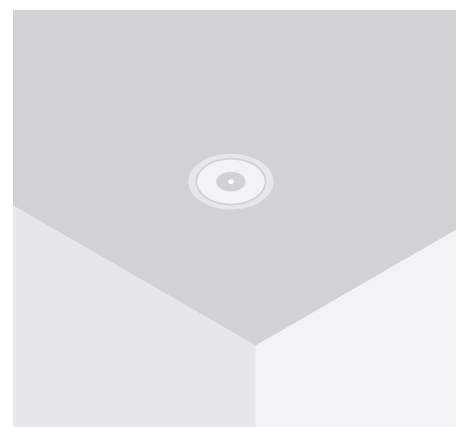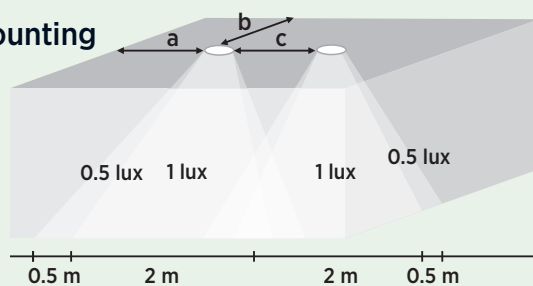

Method of supply	Main battery (Ni-Mh)		Central battery	
Mains supply	120-240 V AC 50/60Hz		120-240 V AC 50/60Hz	
System	Addressable	Conventional	Addressable	Conventional
Product code	CL-4014R /SLAVE/MB	CL-4014R /SLAVE/CON/MB	CL-4014R /SLAVE/CB	CL-4014R /SLAVE/CON/CB
Input current (240V)	12mA	8mA	23mA	20mA
Operation	Standby	Standby	Standby	Standby/Permanent
Bridging time	1-3h	1-3h	-	-
Control LED	Yes	Yes	Yes	No
Method of checking	Automatic	Manual	Automatic	Manual
Certification	CE, UL			