
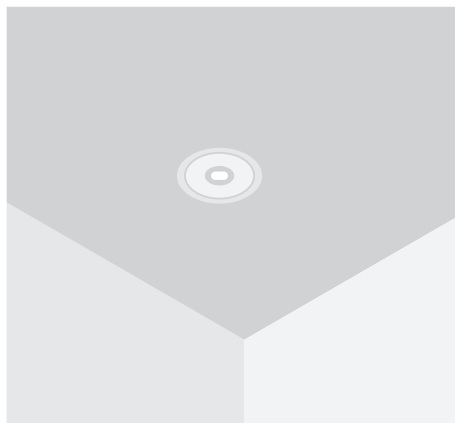


CL-4014F

4W LED/ 50 000 h | IP20 protection | Polycarbonate body/black/white/grey | Mounting: Recessed into the ceiling | 465 lm

Aesthetic LED safety light for recessing into the ceiling. It is available with lens for corridors. It has a great effective range, its practical design makes it easy to install.

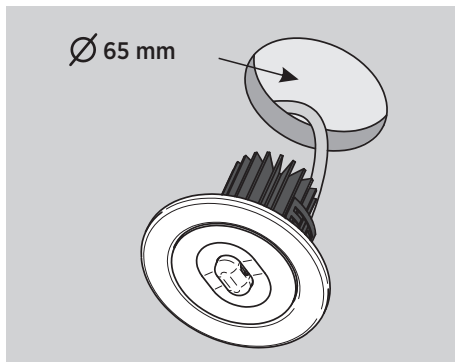

Mounting of lamps relative to each other:

transverse to transverse


For example mounting

height: 3 m

a: 7.24 m

b: 1.96 m

c: 17.59 m

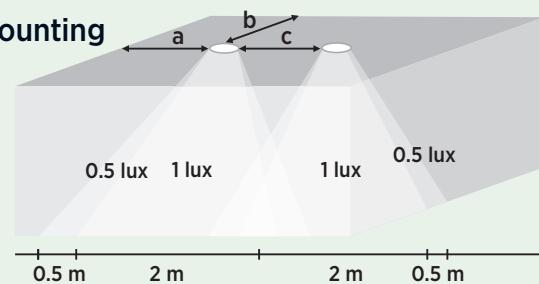

Method of supply	Main battery (Ni-Mh)		Central battery	
	Mains supply	120-240 V AC 50/60Hz		120-240 V AC 50/60Hz
System	Addressable	Conventional	Addressable	Conventional
Product code	CL-4014F /SLAVE/MB	CL-4014F /SLAVE/CON/MB	CL-4014F /SLAVE/CB	CL-4014F /SLAVE/CON/CB
Input current (240V)	12mA	8mA	23mA	20mA
Operation	Standby	Standby	Standby	Standby/Permanent
Bridging time	1-3h	1-3h	-	-
Control LED	Yes	Yes	Yes	No
Method of checking	Automatic	Manual	Automatic	Manual
Certification	CE, UL			