



# CL-6016

6W LED/ 50 000 h | IP65 protection | Polycarbonate body/white | Mounting: On sidewall | 381 lm


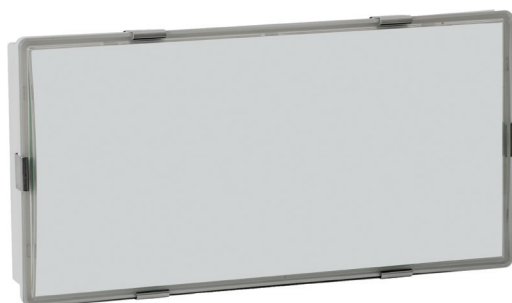


IP65 rated stylish LED safety light for sidewall or ceiling. It is suitable for outdoor use as well and in wet locations (garage, cellar, rest room, etc.)

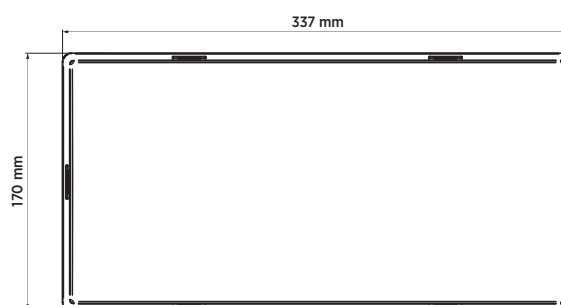

**Mounting of lamps relative to each other:**  
transverse to transverse

**For example mounting**  
height: 3 m  
a: 4.27 m  
b: 4.36 m  
c: 11.01 m

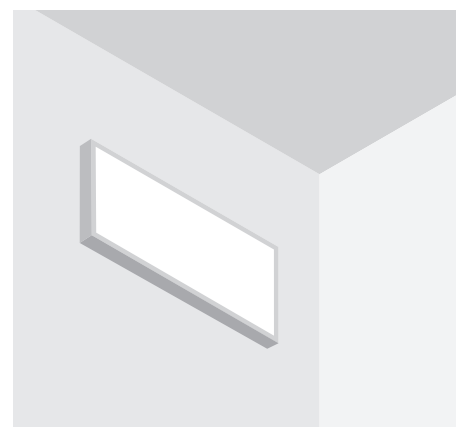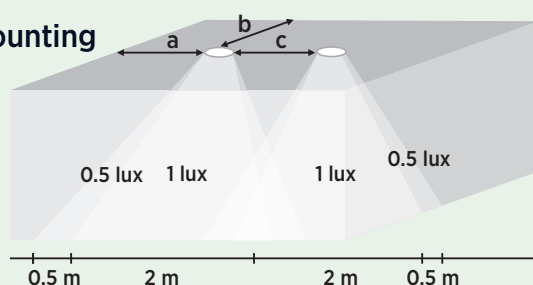

Method of supply	Main battery (Ni-Mh)		Central battery	
Mains supply	120-240 V AC 50/60Hz		120-240 V AC 50/60Hz	
System	Addressable	Conventional	Addressable	Conventional
<b>Product code</b>	<b>CL-6016 SLAVE/MB</b>	<b>CL-6016 SLAVE/CON/MB</b>	<b>CL-6016 SLAVE/CB</b>	<b>CL-6016 SLAVE/CON/CB</b>
Input current (240V)	12mA	8mA	30mA	23mA
Operation	Standby	Standby	Standby	Standby/Permanent
Bridging time	1-3h	1-3h	-	-
Control LED	Yes	Yes	Yes	No
Method of checking	Automatic	Manual	Automatic	Manual
Certification	CE, UL			