



CL-AM MB/CB

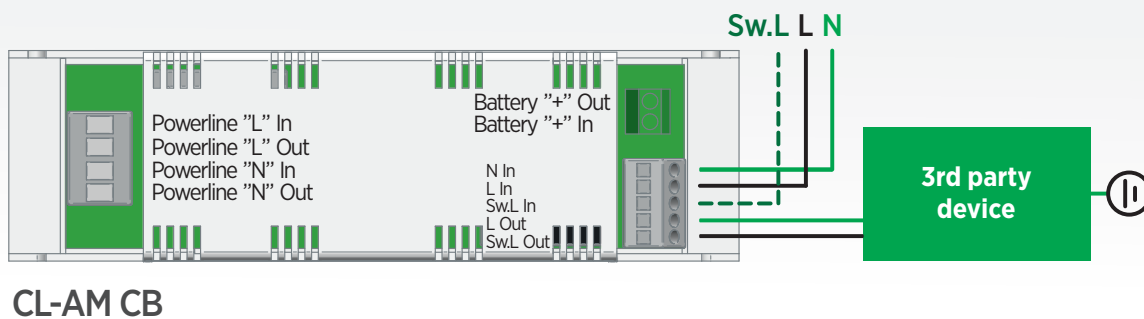

„The CL addressing module enables to integrate 3rd party lights into the addressable system”. External lamps should be tested in our factory before use.

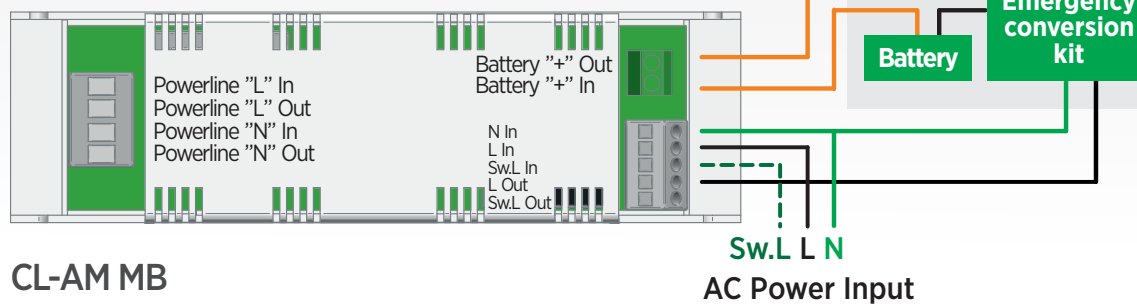

| | CL-AM MB/CB |
|---------------------|--|
| Body | Polycarbonate/white |
| Fixation | On the top or on the side, only for addressable systems |
| Mains supply | AC/DC 120-240V 50/60Hz |
| Input current | 25mA |
| Max load | 100W |
| Ambient temperature | 10°C-30°C |
| Terminals | 2.5 mm ² single wire or 1.5 mm ² stranded and soldered |
| Functions | Phase monitoring, Test mode with changeable cycle time, Controls the inverter's operation, Battery status monitoring, Addressed device status monitoring, It has light switch input. |
| Switching time | <500ms |