




CL-813

3W LED/ 50 000 h | IP54 protection | Polycarbonate body/white | Mounting: Recessed into the sidewall or ceiling | 183 lm

IP54 rated LED safety light, can be mounted into suspended ceiling or sidewall made of plasterboard, or other stratified material. A great choice for external use and for industrial areas, since it is very well protected against dust and water.

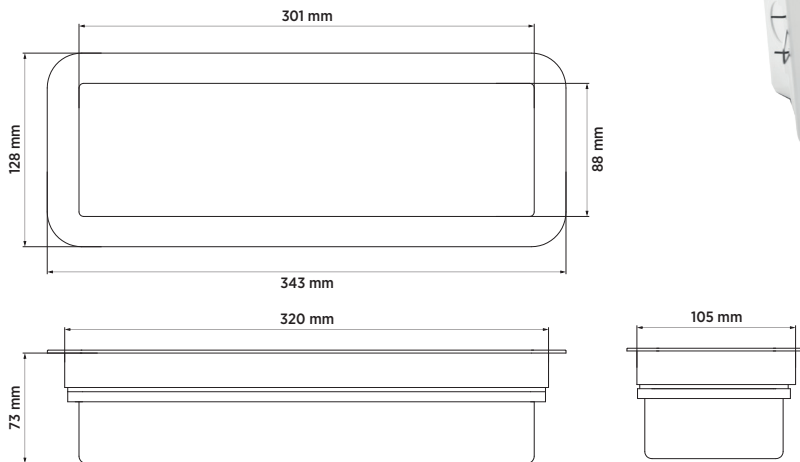

Mounting of lamps relative to each other:
transverse to transverse
For example
mounting height: 3 m

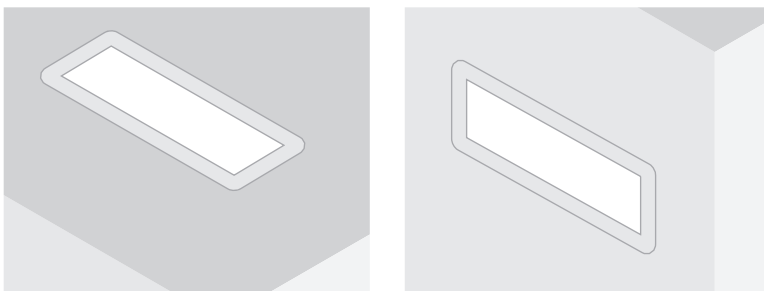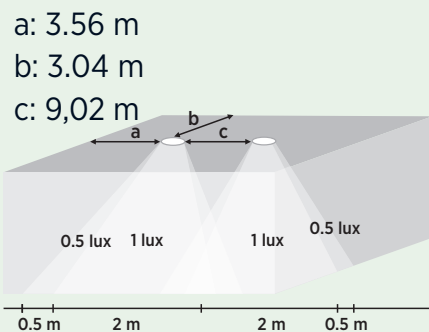

Method of supply	Main battery (Ni-Mh)		Central battery	
Mains supply	120-240 V AC 50/60Hz		120-240 V AC 50/60Hz	
System	Addressable	Conventional	Addressable	Conventional
Product code	CL-813 SLAVE/MB	CL-813 SLAVE/CON/MB	CL-813 SLAVE/CB	CL-813 SLAVE/CON/CB
Input current (240V)	15mA	13mA	25mA	28mA
Operation	Standby	Standby	Standby	Standby/Permanent
Bridging time	1-3h	1-3h	-	-
Control LED	Yes	Yes	Yes	No
Method of checking	Automatic	Manual	Automatic	Manual
Certification	CE, TÜV, UL			