



# CL-816

**6W LED/ 50 000 h | IP54 protection | Polycarbonate body/white | Mounting: Recessed into the sidewall or ceiling | 591 lm**

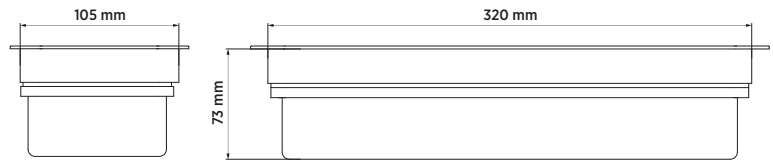

IP54 rated LED safety light, can be mounted into suspended ceiling or sidewall made of plasterboard, or other stratified material. A great choice for external use and for industrial areas, since it is very well protected against dust and water.

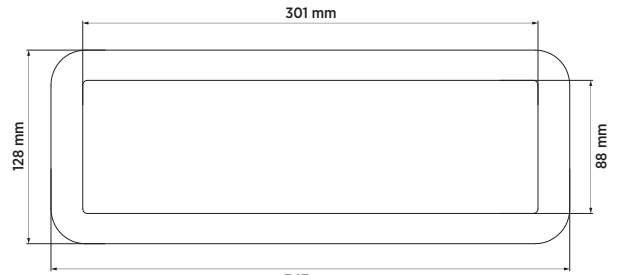

**Mounting of lamps relative to each other:**  
transverse to transverse




**For example**

**mounting height: 3 m**

a: 3.64 m

b: 3.55 m

c: 11.28 m

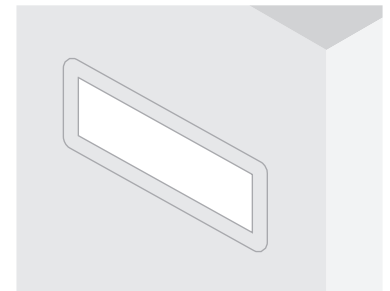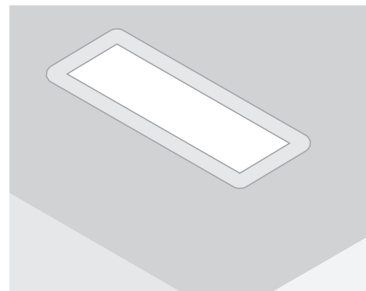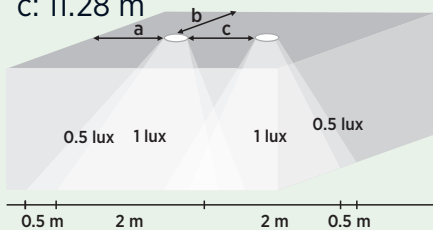

Method of supply	Main battery (Ni-Mh)		Central battery	
Mains supply	120-240 V AC 50/60Hz		120-240 V AC 50/60Hz	
System	Addressable	Conventional	Addressable	Conventional
<b>Product code</b>	<b>CL-816 SLAVE/MB</b>	<b>CL-816 SLAVE/CON/MB</b>	<b>CL-816 SLAVE/CB</b>	<b>CL-816 SLAVE/CON/CB</b>
Input current	12mA	8mA	30mA	23mA
Operation	Standby	Standby	Standby	Standby/Permanent
Bridging time	1-3h	1-3h	-	-
Control LED	Yes	Yes	Yes	No
Method of checking	Automatic	Manual	Automatic	Manual
Certification	CE, UL			